


Walk-in Combo Unit (Refrigerator+Freezer)

Size: 10'-0" x 15'-0" x 8'-7" (Rectangular)

Overall Dimension	10'-0" x 15'-0" x 8'-7" ft / 120 x 180 x 103 inch (WxDxH)
Net weight (lb)	2744
Dimension	See diagram
Warranty	15 Year Panel Warranty and 1 Year Parts Warranty
Finishes	Interior walls: 26 Ga. Stucco Embossed Acrylume Exterior walls: 26 Ga. Stucco Embossed Acrylume Interior ceiling: 26 Ga. Stucco Embossed Acrylume Exterior ceiling: 26 Ga. Stucco Embossed Acrylume
Floor Type	Type F1-20SS Application: Hand Trucks, Log Carts NSF Floor panel rated for 850 LBS/ SQ. FT. 20 Ga. Stainless Steel Type 304 Smooth Integral - Not Reinforced
Accessories	48" LED LIGHT STRIP FIXTURE 96 LUMENS /WATT 120VAC, 0.33 AMPS - TEMP RANGE: -30°F-104°F, SHIP LOOSE RECOMMENDED ONE FIXTURE EVERY 144 SQ. FT. AT 12' HIGH

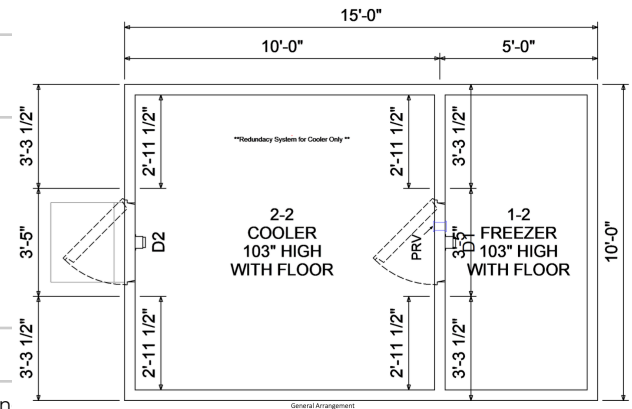

EI-WF-332A Freezer

Compartment 1 of 2 - Indoor Freezer, with Floor

Interior Dimension	9'-4" x 4'-6" x 7'-11" (w x l x h)
Temperature	-10°F (95°F ambient)
Insulation	4" thick AK-XPS4 extruded foam with R-values of R-29 for coolers and for freezers with a 50 Year Thermal Warranty. UL Classified Core Flame Spread 15, Smoke Rating less than 165.
Refrigerant Type	R 448A
Balanced Capacity	3226.0 BTU/H
Door	Standard 30" x 76" Left hinged flush door with brushed hardware. Interior & Exterior finish: 26 Ga. Stucco Embossed Acrylume. Energy saving temperature regulating thermostat heater wire and heated relief vent. Heavy duty deadbolt handle latch with 1/4 turn inside release. Digital LED Thermometer with pilot light switch, 1807 11w, Vapor Proof, 120V. LED fixture. 82 Lumens /watt Angled face . Requires 115vac. 2.2 amps. With 12 x 12 heated frame & glass viewing window



UL Listed

This item has been tested and meets safety standards imposed by the Underwriters Laboratories (UL).

EL-WR-700A Refrigerator

Compartment 2 of 2 - Indoor Cooler, with Floor

Interior Dimension	9'-4" x 9'-6" x 7'-11" (w x l x h)
Temperature	35°F (95°F ambient)
Insulation	4" thick AK-XPS4 extruded foam with R-values of R-29 for coolers and R-32 for freezers with a 50 Year Thermal Warranty. UL Classified Core Flame Spread 15, Smoke Rating less than 165.
Refrigerant Type	R 448A
Balanced Capacity	9450.0 BTU/H
Door	Standard 30" x 76" Left hinged flush door with brushed hardware. Interior & Exterior finish: 26 Ga. Stucco Embossed Acrylume. Heavy duty deadbolt handle latch with 1/4 turn inside release. Digital LED Thermometer with pilot light switch, 1807 11w, Vapor Proof, 120V. LED fixture. 82 Lumens /watt Angled face . Requires 115vac. 1 amps. With 12 x 12 heated frame & glass viewing window, External Ramp 24" deep x 30" wide


ELECTRICAL

Phase	Single
Frequency	60 Hz
Voltage	208-230V
Light	Interior - Vapor proof LED lighting



OPTIONS

Exterior Ramp



Strip Curtain



24/7 Monitoring

Cloud-based continuous monitoring.



Approvals

New York City approval MEA113-87-M

City of Houston Fabrication Certificate No. 694

Department of Energy (DOE) compliance and certified, 6/2017

Miami-Dade County, Outdoor Hurricane High Velocity Wind (170 mph) NOA #17-0802.12 -
State of Florida, Outdoor Hurricane High Velocity Wind (170 mph) #FL 22413

Oregon State Component Insignia Compliance No. M-PFC 688

National Sanitation Foundation (NSF), Standard No. 7